

FEATURES

- Easy and accessible integral web based managing tool
- Logging of all authentication, configuration changes
- Real-time electrical parameters such as information display of voltage, amps, kW, power factor and kW-hr
- E-mail and SMS notification to multiple users in case of events
- Power switch control of individual receptacles (only for switched PDU)
- Sequential start-up setting for individual receptacles (only for switched PDU)

The Liebert® MPS Switched Rack PDU provides the same features and functionality as the Metered Rack PDU with the additional capability of remote on/off control of individual receptacles and sequential start-up setting for individual receptacles.

Liebert® MPS Metered Rack PDU

The Liebert® MPS Metered Rack PDU system delivers power distribution, branch-level monitoring for IT devices. With remote monitoring, the Liebert® Metered Rack PDU is designed to support the growth in rack electrical needs while meeting the new demands for remote power management.

The Liebert® MPS Metered Rack PDU monitors electrical attributes of an individual Rack PDU, including real-time remote and local display of monitoring of aggregate and branch-level electrical parameters (status, thresholds and alarms) including voltage, amps, kW, power factor and kW-hr.

The Liebert® MPS Metered Rack PDU features include branch-level load monitoring, expandable monitoring interface providing simplified growth management; and the convenience of being installed in the Vertiv rack system. Basic rack mounting provisions are also provided. The Liebert® MPS Metered Rack PDUs are available in rack mount and vertical zero-U form factors and are painted black.

Liebert® MPS Switched Rack PDU

The Liebert® MPS Switched Rack PDU provides the same features and functionality as the Metered Rack PDU with the additional capability of remote on/off control of individual receptacles and sequential start-up setting for individual receptacles.



Local monitoring of branch-level real-time voltage and current




Sequential startup for individual receptacles (for Switched PDU only)



Linkable expansion in daisy chain support up to 4 units in one single chain



Higher working temperature up to 55°C. Meets the challenge raised by high-density

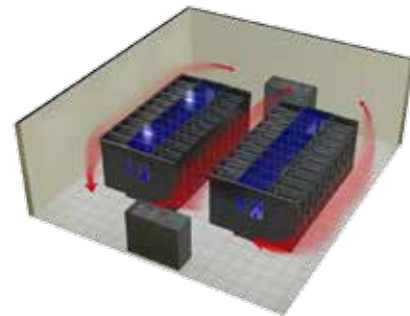


Liebert® MPS Metered & Switched Rack PDU - Installation in Vertiv Racks


a. 19" horizontal rack mount of 1U MPS



b. Tool-less mount on vertical cable tray of Zero-U MPS
(for Vertiv E-Series / Miracel / DCF racks only)

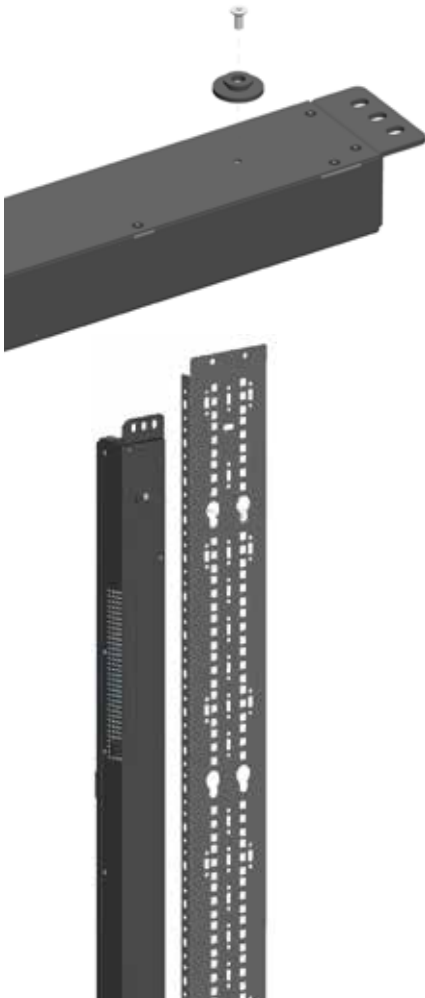

c. Mount on depth member of Zero-U MPS
(standard MPS with 24 receptacles)
(for Vertiv E-Series Rack only)

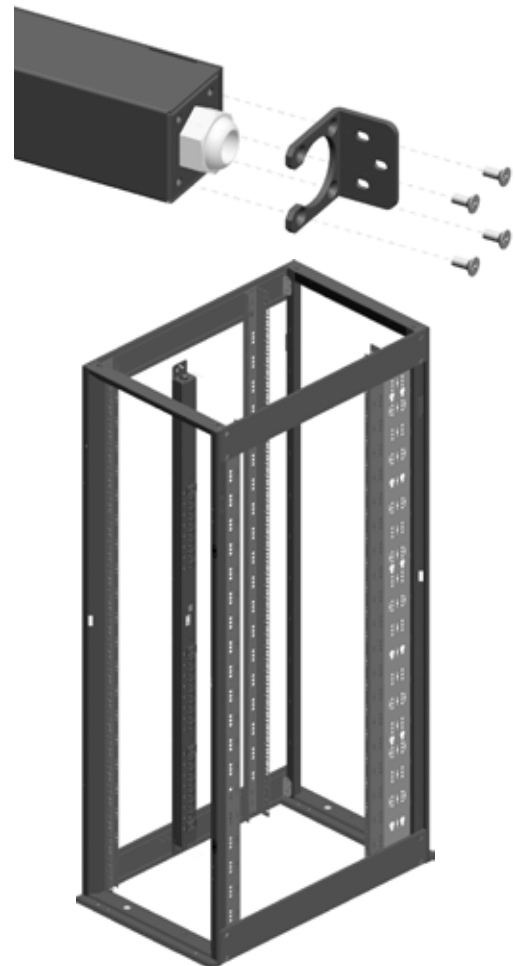

Note: All mounting accessories are included in standard configuration.

Technical Specifications

PART NUMBER	14240046	14240048	14240058	14240059	14240060	14240061
Input Voltage/Frequency			100-240V 45-66HZ			
Output Voltage/Frequency			100-240V 45-66HZ			
Rate Current			16A			
Max.Power (240V)			3800W			
Input Plug	C20	C20	C20	IEC309	C20	IEC309
Input Cable			3 x 1.5mm ² x 3m			
Output Receptacle	C13 x 8			C13 x 20 + C19 x 4		
Individual Receptacles Switched	No	Yes	No	No	Yes	Yes
Overload Protection	No			With 3 way 16A 240V		
Power status light of individual receptacles	No	Yes	No	No	Yes	Yes
Sequential startup for individual receptacles	No	Yes	No	No	Yes	Yes
Max. Quantity in single daisy chain			4			
Dimension (W x H x D mm)	441.4×43.5×138		44.5×1683×44		64.5×1683×44	
Color			Black			
Compliance			CE, C-Tick, RoHs			
Working temperature			-20oC ~ 55oC			
Working humidity			5%RH ~95%RH			
Installation	1U rack mounting (19")			Zero-U vertical mounting		

PART NUMBER	14240062	14240063	14240064	14240065
Input Voltage/Frequency			100-240V 45-66HZ	
Output Voltage/Frequency			100-240V 45-66HZ	
Rate Current			32A	
Max.Power (240V)			7600W	
Input Plug	IEC309	Fixed	IEC309	Fixed
Input Cable			3 x 4mm ² x 3m	
Output Receptacle			C13 x 18 + C19 x 6	
Individual Receptacles Switched	No	No	Yes	Yes
Overload Protection			With 3 way 16A 240V	
Power status light of individual receptacles	No	No	Yes	Yes
Sequential startup for individual receptacles	No	No	Yes	Yes
Max. Quantity in single daisy chain			4	
Dimension (W x H x D mm)	44.5×1683×44			64.5×1683×44
Color			Black	
Compliance			CE, C-Tick, RoHs	
Working temperature			-20oC ~ 55oC	
Working humidity			5%RH ~95%RH	
Installation			Zero-U vertical mounting	

VertivCo.com

© 2017 Vertiv Co. All rights reserved. Vertiv, the Vertiv logo are trademarks or registered trademarks of Vertiv Co. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness herein, Vertiv Co. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.

Liebert®MPS-DS-EN-Asia-V1