



Poseidon2 3268

Remote monitoring of
sensors and detectors
and control of relay outputs



8
1-Wire
UNI
sensors
1-Wire UNI
sensors

4
DIGITAL
input
Digital
Input

4
RELAY
output
Relay
output

8
VIRTUAL
output
Virtual
output

5
SNMP
trap
SNMP
trap

5
E-mail
alert
E-mail
notification

MQTT
protocol
MQTT
protocol

Poseidon2 3268 supports up to **8 sensors** connected over 1-Wire UNI / 1-Wire and up to **4 detectors** connected to digital inputs. Poseidon2 3268 can control **2 digital NO/NC relay outputs**, as well as up to **8 virtual digital outputs (VDO)** at remote Poseidon2 or Damocles2 units (M2M).

A built-in **web server** is used for configuring. The device can be **monitored remotely over the internet** using the free [SensDesk portal](#) in combination with the [SensDesk Mobile application](#) for iOS and Android. It works with [HWg-PDMS](#) and [HWg-Trigger](#).

Poseidon2 devices are designed to monitor and control sensors and digital I/O over the network using **secure M2M protocols (HTTPs, IPv6, SNMPv3)**. With support for **over 50 SNMP and SCADA applications**, Poseidon2 devices can be integrated in a wide range of monitoring and control systems. **MQTT** protocol enables integration in IoT solutions.

Connected via **LAN**. Configuration via **built-in web server**.

All inputs feature **32-bit pulse counters** that **retain their status** even after power failure.

Compatible with a **wide range of third party SW** (SCADA etc.).

A sensor value out of a set safe range as well as a DI state change sends an **alert by e-mail, SMS, SNMP Trap**, or **activates a remote relay** at another Poseidon2 or Damocles2 unit.

With the [HWg-PDMS software](#), **50 pulses can be converted** to cost per time period and **exported** to MS Excel.

MQTT compatibility allows connecting to IoT Hub, MS Azure, AWS IoT, Bluemix Internet of Things and other cloud services.


For Ring or SMS alarm use the [HWg-Trigger software](#) (external GSM modem required), or a [HWg-SMS-GW3 gateway](#) in the same LAN.

Examples for programmers on using the product are available in the [HWg-SDK](#) (Borland C++, MS Visual, VB, C#, PHP, JAVA and more).

Virtual Digital Outputs (VDO) can be mapped to physical digital outputs (relays) of other Poseidon2 or Damocles2 units on the same LAN.

Typical application examples

- Remote environmental monitoring in a cabinet, server room or a datacenter
- Remote I/O control and monitoring over the Ethernet
- UPS / back-up generator monitoring
- Industrial applications
- HVAC monitoring
- Cooler and freezer monitoring + alarm indication
- Security and surveillance systems
- Smart buildings

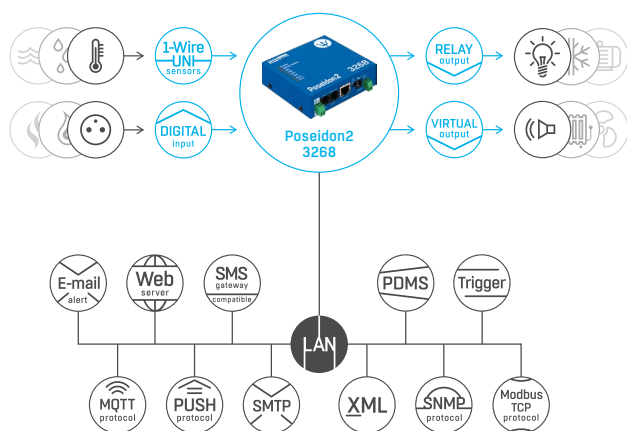

Ethernet	
LAN	RJ45 (100BASE-Tx) – 10/100 Mbps
Supported protocols	MQTT (IoT), SNMPv1, SNMPv3, HWg-PUSH, Modbus/TCP, HTTPS, IPv6, XML, netGSM

Inputs	
Sensors	8× 1-Wire UNI / 1-Wire
Detectors	4× digital input with SO pulse counters

Outputs	
Digital Outputs (DO)	2× Relay Output 50 V / 1A
Virtual Digital Outputs (VDO)	8× (can be mapped to another Poseidon2 or Damocles2)

Dimensions / mass	
Dimensions	100×25×90 mm
Mass	300 g
Housing	Metal

Logger	
Internal memory	250,000 records
Recorded values	DI, DO
Power	9–30 V DC; (PoE optional)

User Interface	
Built-in Web server	Device configuration and data readings
SensDesk Portal / SensDesk Mobile application	Cloud portal for data readings and alerting
HWg-Trigger	Alert redirection to SMS, pop-up messages, PC shutdown
HWg-PDMS	Logging of values, graphs, export to MS Excel
More software	Third-party software, HWg-SDK

Poseidon2 model comparison

Selected features		4002	3468	3268	3266
Inputs	1-Wire UNI	16	8	8	8
	DI	12	4	4	4
	RS-485	26	-	-	-
Outputs	Relay 250 V / 10 A	-	2	-	-
	Relay 50 V / 1A	4	-	2	-
	VDO	8	8	8	-
Power	9-30 V	✓	✓	✓	✓
	-48 V	-	✓	-	-
	PoE	opt.	✓	opt.	opt.
Connected	LAN	✓	✓	✓	✓
	RS-232	✓	-	-	-

Configuration interface

Poseidon2 3268

GENERAL

Sensors

Name	ID	Current Value	Safe Range	Hysteresis	Alarm Alert
Sensor 240	240004	24.1	°C	10.0 .. 60.0	0.0
Sensor 241	44965	1.3	°C	10.0 .. 60.0	0.0

Digital Inputs (DI)

Name	ID	Current Value	Alarm Alert
Binary 1	1	0 (OFF)	Disabled
Binary 2	2	0 (OFF)	Disabled
Binary 3	3	0 (OFF)	Disabled
Binary 4	4	0 (OFF)	Disabled
Comm Monitor 1	123	0 (OFF)	Disabled

Digital Outputs (DO)

Name	ID	Current Value	Mode
BinOut 1	131	0 (OFF)	Manual
BinOut 2	132	0 (OFF)	Manual

Download **Terminal Config (TCP Setup)**

Version: 2.3.7

Versions and related products

Poseidon2 3268
stand-alone device.

Poseidon2 3268 TSet
includes a temperature sensor, door contact and a power adaptor.

Poseidon2 4002 TSet
includes two temperature sensors, door contact and a power adaptor.

Poseidon2 3468 TSet
includes a temperature sensor and a power adaptor.

Poseidon2 3266 THSet
includes a temperature and humidity sensor, door contact and a power adaptor.

HWg-SMS-GW3 Set
SMS gateway for ring and SMS alerting for LAN. Includes antenna and a power adaptor.