



# Dell EMC PowerEdge R650 Installation and Service Manual

## Right control panel view

Figure 1. Right control panel

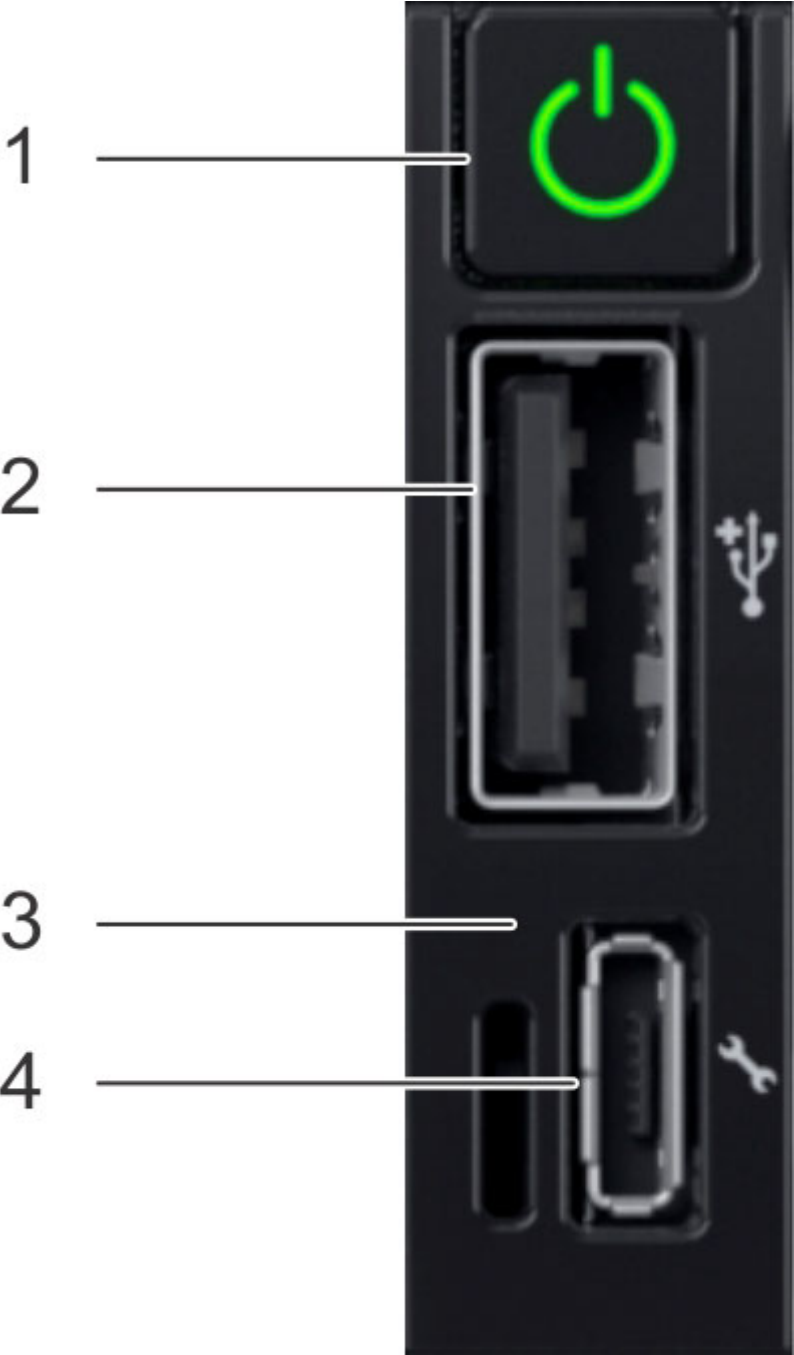








Table 1. Right control panel

ITEM	INDICATOR OR BUTTON	ICON	DESCRIPTION
1	Power button		Indicates if the system is powered on or off. Press the power button to manually power on or off the system. <div> NOTE Press the power button to gracefully shut down the ACPI-compliant operating system.</div>
2	USB 2.0-compliant port		The USB port is a 4-pin connector and 2.0-compliant. This port enables you to connect USB devices to the system.
3	iDRAC Direct LED indicator	N/A	The iDRAC Direct LED indicator lights up to indicate that the iDRAC Direct port is actively connected to a device.

ITEM	INDICATOR OR BUTTON	ICON	DESCRIPTION
4	iDRAC Direct port (Micro-AB USB)		<p>The iDRAC Direct port (Micro-AB USB) enables you to access the iDRAC Direct Micro-AB features. For more information, see the <i>Integrated Dell Remote Access Controller User's Guide</i> available at <a href="https://www.dell.com/idracmanuals">https://www.dell.com/idracmanuals</a>.</p> <div><p> NOTE You can configure iDRAC Direct by using a USB to micro USB (type AB) cable, which you can connect to your laptop or tablet. Cable length should not exceed 3 feet (0.91 meters). Performance could be affected by cable quality.</p></div>

 NOTE For more information, see the *Dell EMC PowerEdge R650 Technical Specifications* on the product documentation page.